

SINGER®

2591D205A



**SINGER® Single Needle Lockstitch Machine
with Vertical Edge Trimmer**

2591D205A



SINGER® Single Needle Lockstitch Machine with Vertical Edge Trimmer

General Applications

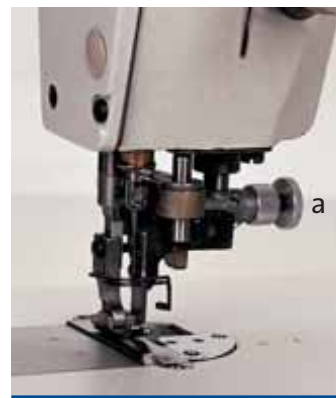
- Light to medium weight materials.

General Specifications



- Bed dimensions
Length: 18-3/4" (477mm), Width: 7" (178mm)
Space to right of needle: 10-5/16" (262mm)
- Outside diameter of machine pulley 2-61/64" (75mm)
- Needle bar stroke: 1-29/64" (37mm)
- Clearance under presser foot:
By hand: 7/32" (5.5mm)
By knee: 21/64" (8.5mm)
- SINGER® needle cat no: 1955-01
- Motor required:
SINGER® clutch motor high speed 1/2H.P.
- Vertical trim margin (distance between needle and trim knife):
Standard: 3/16" (4.8mm)
Including accessories: 1/8" (3.2mm), 1/4" (6.4mm)
Optional: 5/64" (2.0mm), 3/32" (2.4mm), 5/32" (4.0mm)
5/16" (7.9mm), 3/8" (9.5mm)

Features


- White color of the machine brightens the work environment and makes operator feel comfortable.
- Feed regulating dial on front of arm.
- Fully automatic lubrication system.
- Vertical edge trimmer knife can easily be disengaged by knob(a).
- Built-in waste material chute.
- Built-in knee lifter.
- Easy to attach the belt guard.



Specification Chart

Variety	Features	Feed type	Max. speed (SPM)	Max. Stitch Length s.p.i.	Max. Stitch Length mm	Applications
2591D205A			4,500	6.4	4.0	Shirts, blouses, dresses, etc.

 Drop feed and reverse feed. The reverse lever is spring loaded.

 Vertical edge trimmer

SINGER®